


Control Unit Systems

BZA85 Series Explosion-proof Control Unit Systems



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Copper-free Aluminium Alloy, powder coated surface.

■ Catalogue number logic

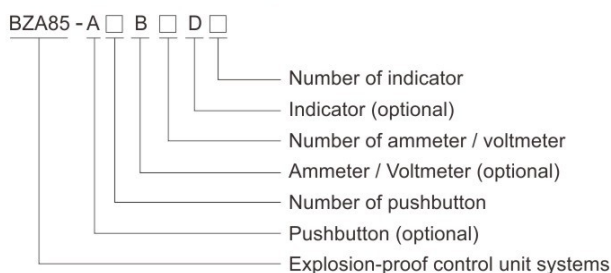



■ Note

1. Please refer to the Selection table on P4/25~26.
2. Please select internal components as below:
 - Selection table of HA pushbutton on P4/10~13 (nominal contact is 1NO+1NC);
 - Selection table of HD indicator on P4/14~15;
 - Dimension drawings of ammeter (type 48) and voltmeter (type 48) see P4/27.
3. Example: BZA85-A1
 - Components: One control button;
 - Tech. Details: One start control button (40036B + 40033, green, 1NO+1NC).
4. Special requirements on request.















Zones 1&2; 21&22

Control Unit Systems

BZA85 Series Explosion-proof Control Unit Systems

Technical data				
Explosion-proof control unit systems BZA85				
Explosion protection Global (IECEX) Gas and dust Europe (ATEX) Gas and dust	IECEX CQM 17.0021X Ex db IIC T6 Gb Ex tb IIIC T80°C Db IP66 TÜV CY 18 ATEX 0206093 X			
	 II 2 G Ex db IIC T6 Gb  II 2 D Ex tb IIIC T80°C Db IP66 IECEX; ATEX; CU-TR			
Certificates	IECEX; ATEX; CU-TR			
Conformity to standards	EN 60079-0, EN 60079-1, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC60079-31			
Enclosure material	Copper-free Aluminium Alloy, powder coated surface			
Enclosure colour	Window grey (RAL7040)			
Exposed fastener	Stainless steel			
Rated voltage	Max.500V AC, 250V DC			
Rated current	Max.10A (AC), 6A (DC)			
Degree of protection	IP66, IP67(optional)			
Ambient temperature	-60°C ~+60°C			
Components HA pushbutton HD indicator Ammeter (type 48) / Voltmeter (type 48)	Technical data on P4/8~11			
	Technical data on P4/12~13			
		Working mode	Accuracy	Overload times
	Ammeter Voltmeter	Electromagnetic type (moving iron)	Class 1.5	5 times (2 or 6 times on request) -
Cable entries	Standard 2 x M25 x 1.5 plugs 2 x NPT3/4" plugs on request			
Cable gland (optional)	DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~31.			













Selection table (Pushbutton / Indicator)				
Outline	Colour	Chart of contact	Ordering code	Weight (kg)
Indicator 	Red 		40171A	0.65
	Green 		40171B	
Spring-return button 	Red 		40172A	0.65
	Green 		40172B	
Mushroom stay-put emergency pushbutton 	Red 		40173	0.7
Mushroom turn-to-release emergency pushbutton 	Red 		40174	0.7

Control Unit Systems

BZA85 Series Explosion-proof Control Unit Systems


Selection table (Pushbutton)

Outline	Chart of contact	Ordering code	Weight (kg)
Key-operated pushbutton 	 	40175A	0.7
	 	40175B	0.7
Rotary button 	 	40176A	0.7
	 	40176B	0.7

Selection table (Ammeter)

Version	Description	Overload scale	Measuring range	Ordering code	Weight (kg)
	Direct measuring	-	0~20/40 mA	40177	0.70
			4~20/40 mA	40178	
	Direct measuring	-	0~1 A	40179	
			0~5 A	40180	
	For CT (current transformer)	2 times or 6 times	sec. 1 A	40181	
			sec. 5 A	40182	


Selection table (Voltmeter)

Version	Description	Measuring range	Ordering code	Weight (kg)
	Direct measuring	0~10 V	40183	0.70
		0~25 V	40184	
		0~40 V	40185	
		0~60 V	40186	
		0~100 V	40187	
		0~150 V	40188	
		0~250 V	40189	
		0~300 V	40190	
		0~450 V	40191	
		0~500 V	40192	
	For PT (potential transformer)	sec. 100 V	40193	
		sec. 110 V	40194	
		sec. 120 V	40195	



Control Unit Systems

BZA85 Series Explosion-proof Control Unit Systems



Dimension drawings (all dimensions in mm) - subject to alteration





Indicator





Spring-return button





Mushroom turn-to-release
emergency pushbutton





Mushroom stay-put
emergency pushbutton





Key-operated pushbutton



Rotary button



Ammeter / Voltmeter



Ammeter (48 type) / Voltmeter (48 type)

