


Light Fittings for Fluorescent Lamp HRY81-QT Series Explosion-proof Fluorescent Lamp



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 2, Groups A, B, C, D
- ◆ Polycarbonate diffuser, high transmittance, resistance to heavy impact.
- ◆ Main enclosure is extruding formed of copper-free aluminium, alloy anodic-oxidation treatment for surface. Both ends of enclosures are die-casting formed of copper-free aluminium alloy, powder coated surface.
- ◆ Built-in electronic ballast, power factor ≥ 0.95 .
- ◆ Special-made mounting bracket, the illumination angle can be adjusted on request.
- ◆ Emergency function is available on request.
- ◆ End of lamp life (EOL) rectification effect protection.

Catalogue number logic

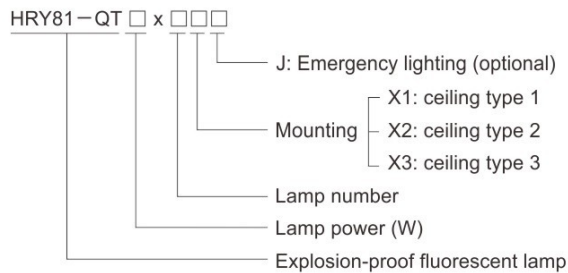

Selection table


Type / Ordering code	Lamp power(W)	Weight(kg)	Type / Ordering code	Lamp power(W)	Weight(kg)
HRY81-QT18 x 2□	18 x 2	6.80	HRY81-QT18 x 2□J	18 x 2	7.50
HRY81-QT36 x 2□	36 x 2	8.50	HRY81-QT36 x 2□J	36 x 2	9.50

Note: Emergency lighting function is unavailable for routine products, please specify if needed.

Photometric data


HRY81-QT 18W x 2

Lamp power (W)	Rated luminous flux (Lamp tube)	Luminaire efficiency
18 x 2	2600lm	65%



HRY81-QT 36W x 2

Lamp power (W)	Rated luminous flux (Lamp tube)	Luminaire efficiency
36 x 2	6500lm	65%



We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

Zones 1&2; 21&22

Light Fittings for Fluorescent Lamp

HR Y81-QT Series Explosion-proof Fluorescent Lamp

Technical data	
Explosion-proof fluorescent lamp HRY81-QT□x□□□□	
Explosion protection	
Global (IECEX)	IECEX (applied for)
Gas and dust	Ex d e q IIC T4 Gb
Europe (ATEX)	Ex tb IIIC T80°C Db IP66
Gas and dust	ATEX (applied for)
	⊕ II 2 G Ex d e q IIC T4 Gb
	⊕ II 2 D Ex tb IIIC T80°C Db IP66
Certificates	IECEX; ATEX
Conformity to standards	EN 60079-0, EN 60079-1, EN 60079-5, EN 60079-7, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC 60079-5, IEC 60079-7, IEC 60079-31
Material	
Main enclosure	Copper-free Aluminium Alloy, anodic-oxidation treatment for surface.
Both ends of enclosure	Copper-free Aluminium Alloy, powder coated surface
Diffuser	Polycarbonate, 90% light transmission, stands 7J impact
Ballast	Electronic ballast, power factor ≥ 0.95
Exposed fastener	Stainless steel
Lamp	
Lamp specification	T8 tube (supplied with light fittings)
Lamp power (W)	18W x 2, 36W x 2
Emergency power (W)	18W x 1, 36W x 1
Rated voltage	96~254V AC 50/60Hz
Degree of protection	IP66
Ambient temperature	-40°C~+60°C
Terminal	3 x 1.5~4mm ² (L+N+PE)
Cable entries	1 x G3/4"
Cable gland	Supplied with seal gasket and gland nut; Cable gland on request.
Available cable outer diameter	Φ 10~Φ 14 (mm)
Emergency data	
Emergency starting time	0.3s
Charging time	24h
Emergency lighting time	120min (180min is optional)



Mounting type (all dimensions in mm) - subject to alteration	
<p>X1: ceiling type 1</p>	
<p>X2: ceiling type 2</p>	
<p>X3: ceiling type 3</p>	